


## VZ Four-Shaft-Shredder

VOTECS

bulky and very long  
timber waste  
timber cuts  
long boards  
and pallets  
types of packaging  
and cartons



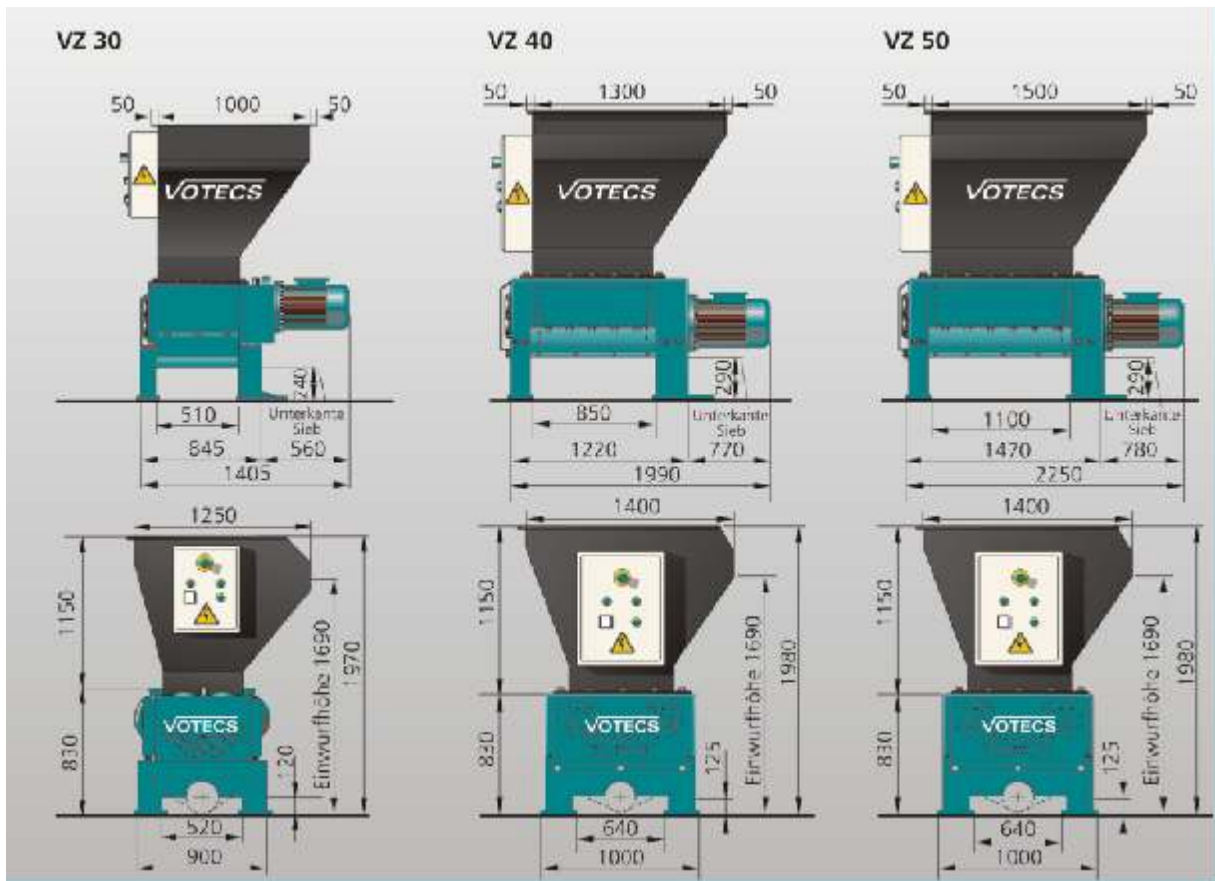

Technical Data	VZ 30	VZ 40	VZ 50
Hopper opening:			
Width (mm):	1.000	1.300	1.500
Length (mm):	1.250	1.400	1.400
Cutting chamber: :			
Working width (mm):	462	760	990
Length (mm):	562	700	700
Disk diameter (mm):	235	280	280
Motor performance (kW):	2 x 7,5; 2 x 11	2 x 15; 2 x 18,5; 2 x 22	2 x 15; 2 x 18,5; 2 x 22; 2 x 30
Throughput:	*This may vary according to equipment and drive performance of the machine.		
Screen-Ø 20 mm (kg/h):	300 - 500	600 - 1.200	800 - 1.500
Screen-Ø 40 mm (kg/h):	500 - 800	800 - 1.500	1.000 - 2.000
Connection-Ø (mm):	200	200	200
Weight ca. (kg):	1.300	2.500	3.000



#### Standard equipment

- ✓ Cutting chamber with 2 cutter shafts and 2 spacer shafts
- ✓ twin drive with sealed oilbath gearbox
- ✓ automatic reverse and automatic overload protection
- ✓ breaker guide system to prevent long granulates

#### Options

- ✓ cutting chamber with four cutting shafts
- ✓ specialised hoppers for individual applications
- ✓ hydraulic press-down device
- ✓ discharge worm screw or suction system
- ✓ Special designs on request